# **Master Controller**

## MC 400

#### **Features**

- Parallel redundant signals for traction and braking via absolute encoders
- Two emergency brake switches
- Spring back return to coast from increase power and decrease power. (three steps in each direction)
- Mechanical interlock in "0" position with release button in handle
- Emergency brake position
- Seven brake steps



#### **Technical description**

- Master Controller constructed by steel and aluminium parts, surface treated for tough conditions.

### **Technical data**


Power supply for digital signals: DC 24-30 V


- Weight: 5 kg


Double absolute encoders

Electrical interface: D-sub connector

- 73,5 degrees operating angle

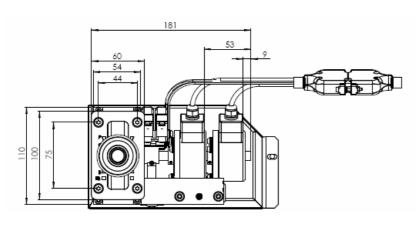







Phone: +46 278 322 50

www.aqg.se